


MODEL KC70

KC70

HIGH EFFICIENCY MULTICRYSTAL PHOTOVOLTAIC MODULE

TYPICAL OUTPUT 70 Wp

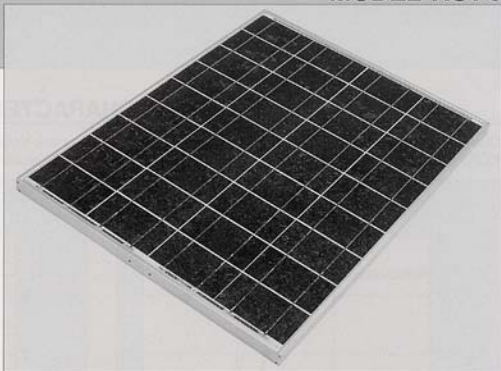

HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities have produced a highly efficient multicrystal photovoltaic modules.

The conversion efficiency of the Kyocera solar cell is over 14%.

These cells are encapsulated between a tempered glass cover and an EVA pottant with PVF back sheet to provide maximum protection from the severest environmental conditions.

The entire laminate is installed in an anodized aluminum frame to provide structural strength and ease of installation.

APPLICATIONS

- Microwave/Radio repeater stations
- Electrification of villages in remote areas
- Medical facilities in rural areas
- Power source for summer vacation homes
- Emergency communication systems
- Water quality and environmental data monitoring systems
- Navigation lighthouses, and ocean buoys
- Pumping systems for irrigation, rural water supplies and livestock watering
- Aviation obstruction lights
- Cathodic protection systems
- Desalination systems
- Recreational vehicles
- Railroad signals
- Sailboat charging systems

SPECIFICATIONS

■ Electrical Specifications


MODEL	KC70
Maximum Power	70 Watts
Maximum Power Voltage	16.9 Volts
Maximum Power Current	4.14 Amps
Open Circuit Voltage	21.5 Volts
Short-Circuit Current	4.35 Amps
Length	865mm (34.1in.)
Width	652mm (25.7in.)
Depth	56mm (2.2in.)
Weight	7.0kg (15.4lbs.)

Note: The electrical specifications are under test conditions of irradiance of 1kW/m², Spectrum of 1.5 air mass and cell temperature of 25°C

Kyocera reserves the right to modify these specifications without notice.


■ Physical Specifications

(Unit: mm)

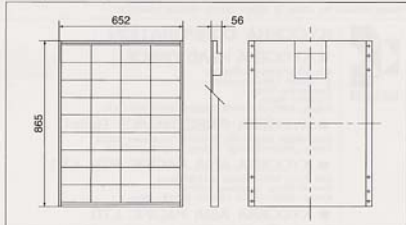


ELECTRICAL CHARACTERISTICS

Current-Voltage characteristics of Photovoltaic Module KC70 at various cell temperatures

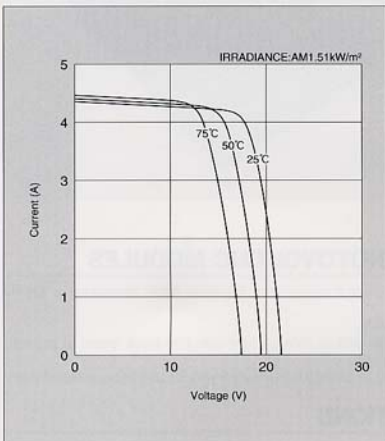

Current-Voltage characteristics of Photovoltaic Module KC70 at various irradiance levels

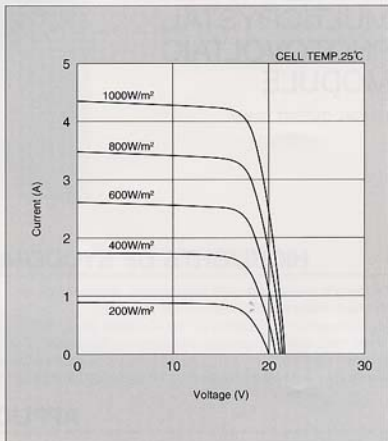

QUALITY ASSURANCE

Kyocera multicrystal photovoltaic modules exceed government specifications for the following tests.

- Thermal cycling test
- Thermal shock test
- Thermal/Freezing and high humidity cycling test
- Electrical isolation test
- Hail impact test
- Mechanical, wind and twist loading test
- Salt mist test
- Light and water-exposure test
- Field exposure test

Please contact our office to obtain details without hesitation.



KYOCERA CORPORATION

■ KYOCERA HEAD OFFICE

SOLAR ENERGY DIVISION

8 Takeda, Tobadono-cho

Fushimi-ku, Kyoto

612-8501 Japan

Phone: (81)75-604-3476 Telefax: (81)75-604-3475

● KYOCERA FINECERAMICS GmbH

Fritz Muller Straße 107, D-73730 Esslingen, F.R.G.

Phone: (49)711-9393417 Telefax: (49)711-9393450

● KYOCERA ASIA PACIFIC PTE. LTD.

298 Tiong Bahru Road, # 13-03/04/05

Central Plaza, Singapore 168730

Phone: (65)271-0950 Telefax: (65)271-0950

● KYOCERA ASIA PACIFIC LTD.

Room 802, Tower 1 South Seas Centre, 75 Mody Road,

Tamshatsui East, Kowloon Hong Kong

Phone: (852)2-7237183 Telefax: (852)2-7244501

● KYOCERA ASIA PACIFIC LTD., TAIPEI BRANCH

Suite 501, Asia Enterprise Center,

No.142-144, Sec. 3, Min Chuan E Road Taipei, Taiwan

Phone: (866)2-2719-3595 Telefax: (866)2-2719-3587

● Kyocera Solar, Inc.

7812 East Azusa Drive

Scottsdale, AZ 85260

Phone: (480)948-6003 or (800)223-9580 Telefax: (480)463-6431

● Kyocera Solar, Inc. -Sunelco Division

100 Shields Street

P.O.Box 787

Hamilton, MT 59840

Phone: (406)363-6924 or (800)338-6844 Telefax: (406)363-6046

● Kyocera Solar Pty, Ltd.

36 Windsor Street, Unit 6

Stamford 4053

Queensland, Australia

Phone: (61)7-3856-5388 Telefax: (61)7-3856-5443

● Kyocera Solar Argentina S.A.

Mexico 2145, (B540) Martinez

Provincia de Buenos Aires

Argentina

Phone: (54)11-4836-8040 Telefax: (54)11-4836-1381

● Kyocera Solar do Brazil LTDA.

Energias Renovaveis LTDA,

Rua Mauricio de Costa Faria, 85

22780 260, Recreio, Rio de Janeiro, Brazil

Phone: (55)21-2437-8325 Telefax: (55)21-2437-2338